

1.2" 5x7 Dot Matrix Display

FEATURES


- 1.2" 5x7 dot matrix
- Additional colors/materials available

OPTO-ELECTRICAL CHARACTERISTICS (Ta = 25°C)

PART NO.	PEAK WAVE LENGTH (nm)	EMITTED COLOR	FACE COLORS		MAXIMUM RATINGS			OPTO-ELECTRICAL CHARACTERISTICS								PIN-OUT
			SURFACE COLOR	EPOXY COLOR	IF (mA)	VR (V)	PD (mW)	VF(V)			IR(μA)		IV(μcd)			
								typ.	max.	@mA	max.	@VR	typ. per dot	@mA		
MTAN2111-11A	567	Green	Black	White	30	5	85	2.1	3.0	20	100	5	4000	10	1	
MTAN4111-11A	635	Orange	Grey	White	30	5	85	2.1	3.0	20	100	5	4600	10	1	
MTAN4111R-11A	635	Hi-Eff Red	Red	Red	30	5	85	2.1	3.0	20	100	5	4600	10	1	
MTAN7111M-11A	660	Ultra Red	Grey	White	30	4	70	1.7	2.2	20	100	4	24200	20	1	
MTAN2111-21C	567	Green	Black	White	30	5	85	2.1	3.0	20	100	5	4000	10	2	
MTAN4111-21C	635	Orange	Grey	White	30	5	85	2.1	3.0	20	100	5	4600	10	2	
MTAN4111R-21C	635	Hi-Eff Red	Red	Red	30	5	85	2.1	3.0	20	100	5	4600	10	2	
MTAN7111M-21C	660	Ultra Red	Grey	White	30	4	70	1.7	2.2	20	100	4	24200	20	2	

Operating Temperature: -25~+85, Storage Temperature: -25~+100. Other face/epoxy colors are available.

PACKAGE DIMENSIONS AND PIN FUNCTIONS

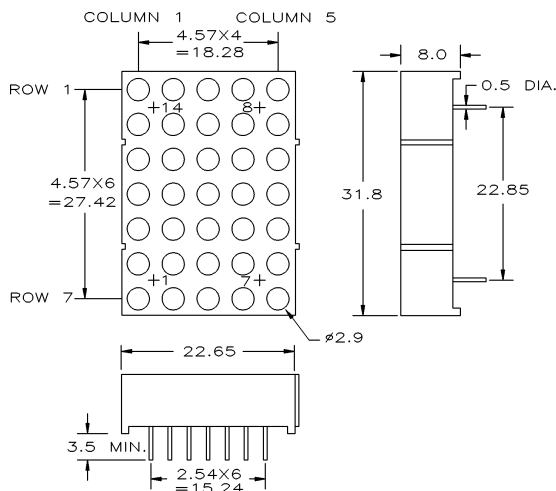

PINOUT 1

COLUMN ANODE

PIN NO. FUNCTION

1. CATHODE ROW 5
2. CATHODE ROW 7
3. ANODE COLUMN 2
4. ANODE COLUMN 3
5. CATHODE ROW 4
6. ANODE COLUMN 5
7. CATHODE ROW 6
8. CATHODE ROW 3
9. CATHODE ROW 1
10. ANODE COLUMN 4
11. ANODE COLUMN 3
12. CATHODE ROW 4
13. ANODE COLUMN 1
14. CATHODE ROW 2

PINOUT 2

COLUMN CATHODE

PIN NO. FUNCTION

1. ANODE ROW 5
2. ANODE ROW 7
3. CATHODE COLUMN 2
4. CATHODE COLUMN 3
5. ANODE ROW 4
6. CATHODE COLUMN 5
7. ANODE ROW 6
8. ANODE ROW 3
9. ANODE ROW 1
10. CATHODE COLUMN 4
11. CATHODE COLUMN 3
12. ANODE ROW 4
13. CATHODE COLUMN 1
14. ANODE ROW 2

1. ALL DIMENSIONS ARE IN mm, TOLERANCE IS ± 0.25 mm UNLESS OTHERWISE SPECIFIED.
2. THE SLOPE ANGLE OF ANY PIN MAY BE $\pm 5.0^\circ$ MAX.



120 Broadway • Menands, New York 12204

Toll Free: (800) 98-4LEDs • Fax: (518) 432-7454

For up-to-date product info visit our web site at www.marktechopto.com

All specifications subject to change.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.