

TA7140P**VOLTAGE AMPLIFIER
LOW OUTPUT POWER AMPLIFIER**

- Especially Suitable for Line Output Amplifier Recording Head Driver and Headphone Driver of Tape Recorder Deck.
- Low Noise : $V_{NI}=1\mu V_{rms}$
- Wide Operating Supply Voltage Range
: $V_{CC}=3.5\sim 25V$
- 150mW Audio Output Power at $V_{CC}=20V$, $R_L=150\Omega$

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	25	V
Power Dissipation (Note)	P_D	400	mW
Operating Temperature	T_{opr}	-25 ~ 75	°C
Storage Temperature	T_{stg}	-55 ~ 125	°C

Note: Derated above $T_a=25^\circ C$ in the proportion of $4mW/^\circ C$.


ELECTRICAL CHARACTERISTICS (Unless otherwise specified)

$V_{CC}=20V$, $T_a=25^\circ C$, $R_L=150\Omega$, $R_f=100\Omega$, $R_g=600\Omega$, $f=1kHz$

CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Supply Voltage Range	V_{CCopr}	-	-	3.5	20	25	V
Supply Current	I_{CC}	-	f=1kHz $V_{OUT}=0$	-	4.0	6.0	mA
			$V_{OUT}=4.5V_{rms}$	-	16.5	-	
Voltage Gain (Open Loop)	G_{VO}	-	$R_f=0\Omega$	-	63	-	dB
Voltage Gain (Closed Loop) (Note)	G_V	-	-	36.5	40	43.5	dB
Total Harmonic Distortion	THD	-	$V_{OUT}=4.5V_{rms}$	-	0.5	1	%
			$V_{CC}=6.5V$, $V_{OUT}=1.0V_{rms}$	-	1	-	
Maximum Output Voltage	V_{OM}	-	THD=10%	-	6	-	V_{rms}
Input Resistance	R_{IN}	-	-	-	30	-	k Ω
Output Noise Voltage	V_{NO}	-	BW=20Hz ~ 20kHz, $R_g=1k\Omega$	-	100	200	μV_{rms}

Note: In regard to the value of voltage gain (closed loop), it is possible to be classified.

Unit in mm

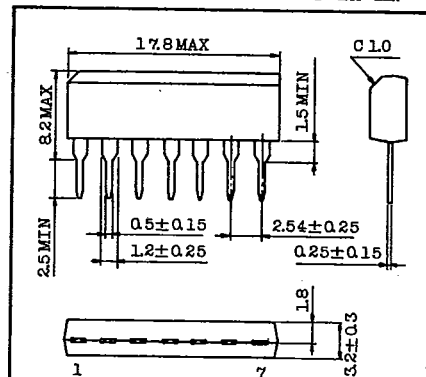

Lead pitch is 2.54 and tolerance is ± 0.25 against theoretical center of each lead that is obtained on the basis of No.1 lead.

JEDEC


TOSHIBA S7A-P

TOSHIBA


TA7140P

T-74-05-01

EQUIVALENT CIRCUIT

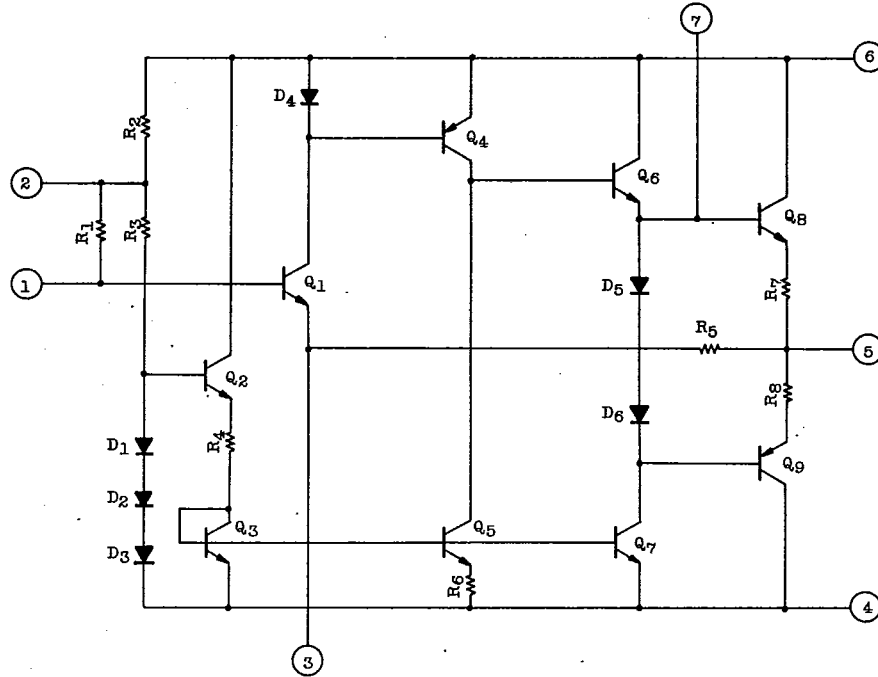







TEST CIRCUIT

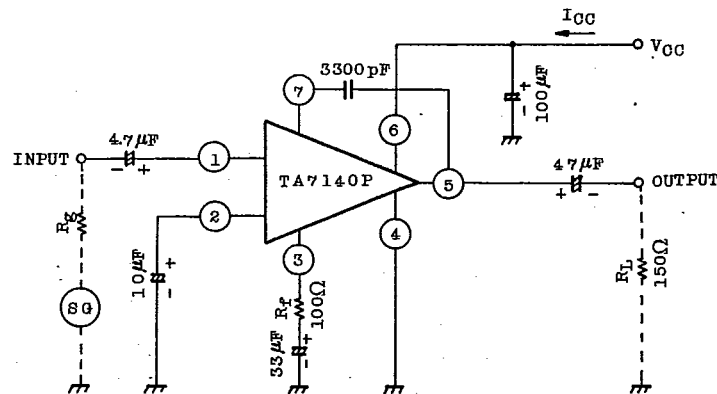

AUDIO LINEAR IC

TA7140P







T-74-05-01

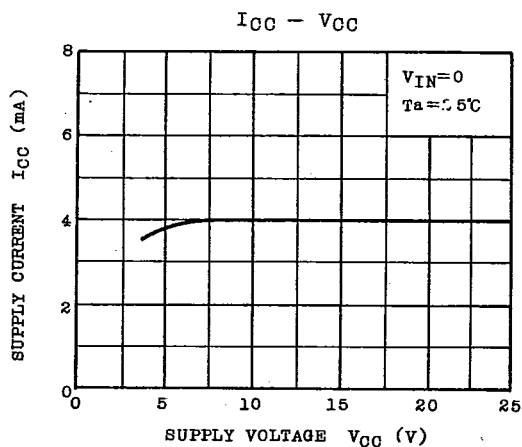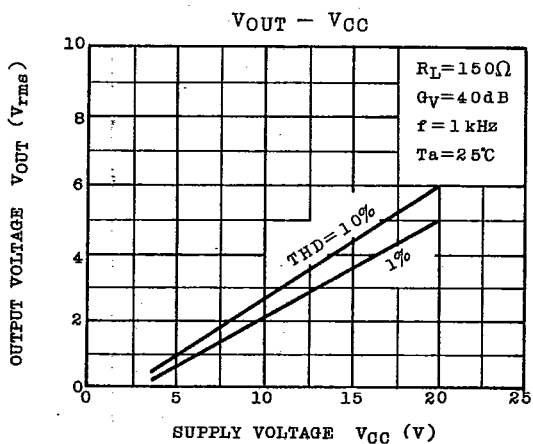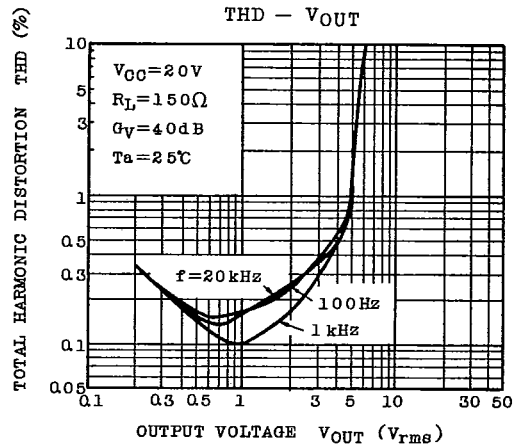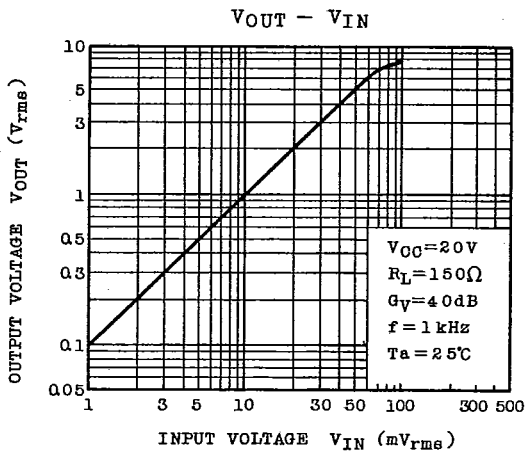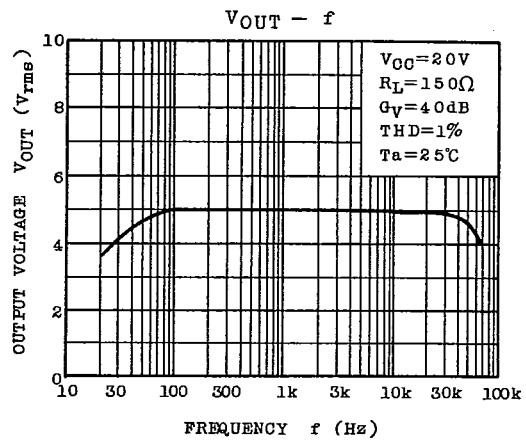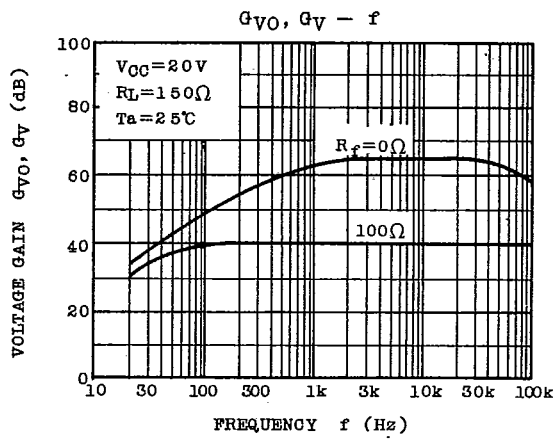

TOSHIBA

TA7140P

T-74-05-01

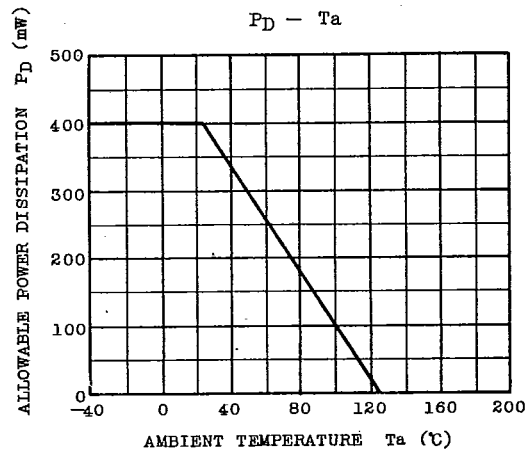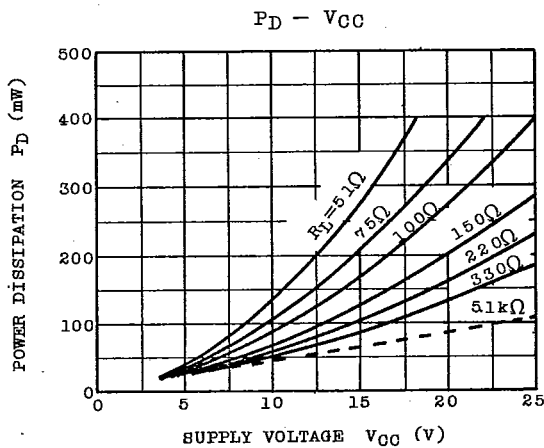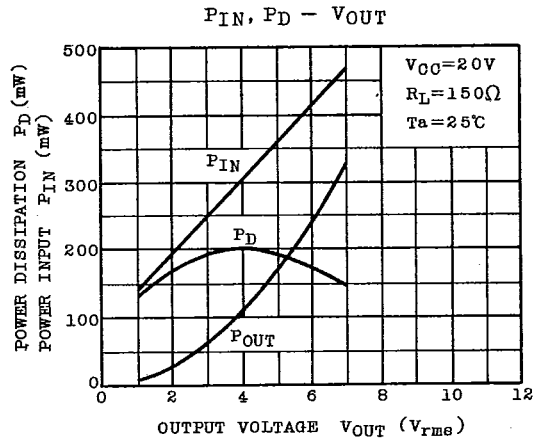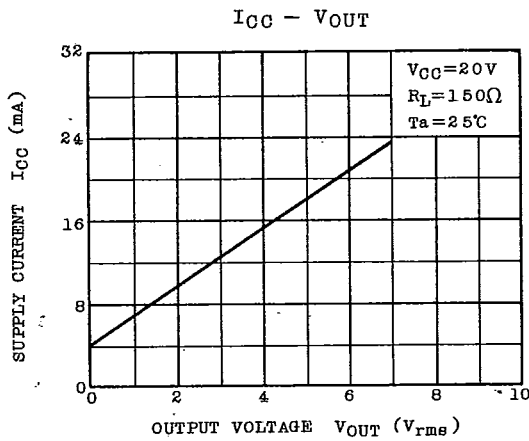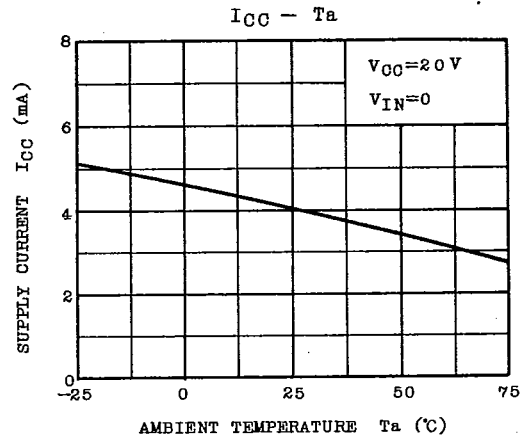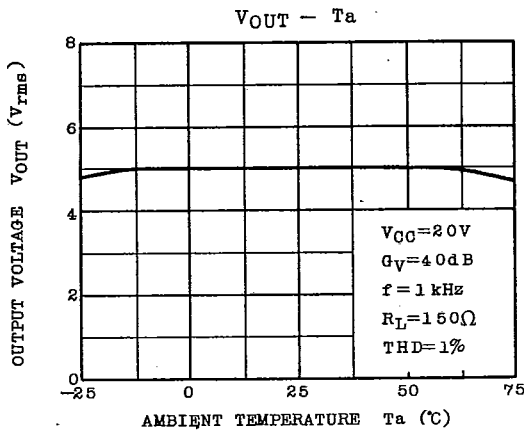


AUDIO LINEAR IC

TA7140P


T-74-05-01

APPLICATION CIRCUIT


1. HEADPHONE AMPLIFIER

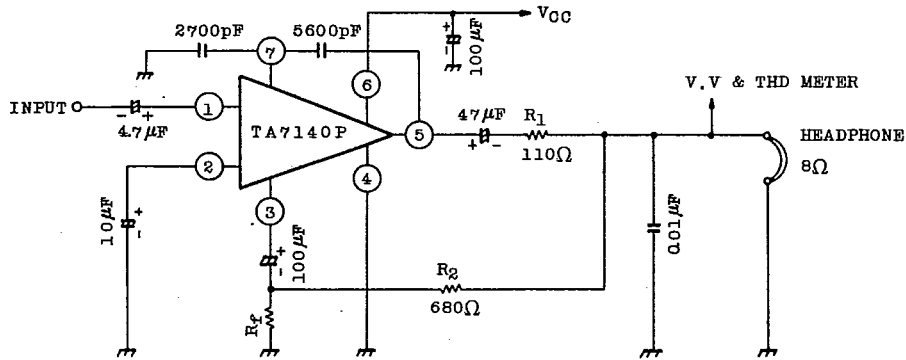

2. BUFFER AMPLIFIER ($G_v=9\text{dB}$)

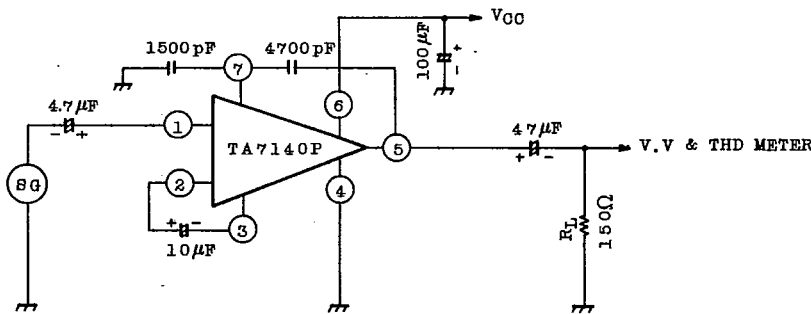

3. FLAT AMPLIFIER

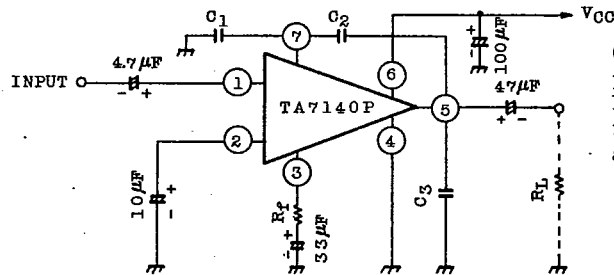






C_1, C_2 and C_3 are for preventing parasitic oscillation. For various closed loop gain, recommended compensation values are shown in the following table.

VOLTAGE GAIN

G_v	40dB	30dB	20dB	10dB	0dB
R_f [Ω]	100	330	1.1k	4.7k	∞ (open)
C_1 [pF]	0	1500	1500	1500	1500
C_2 [pF]	3300	4700	4700	4700	4700
C_3 [pF]	0	0	0	0	2200

TA7140P

T-74-05-01

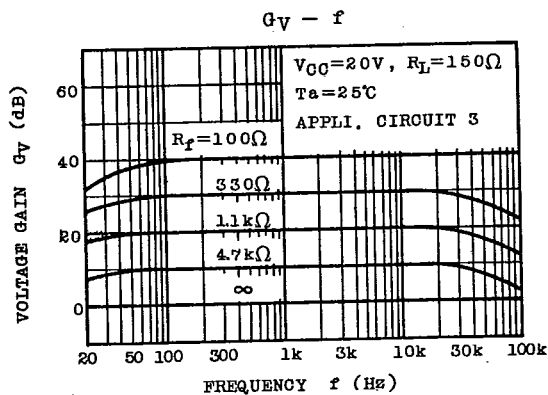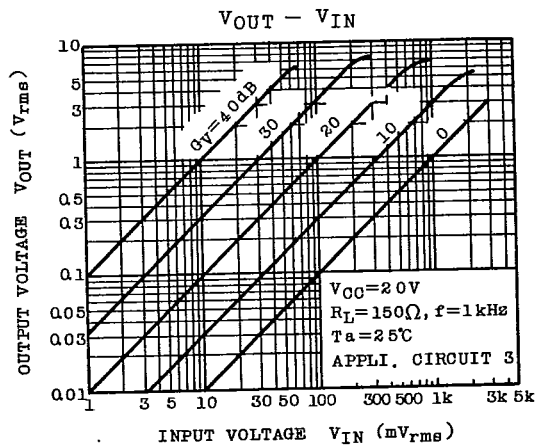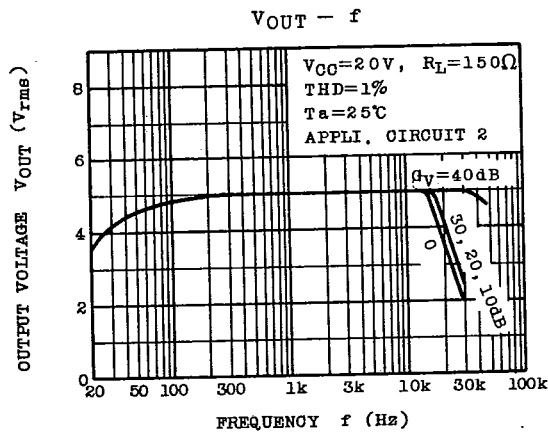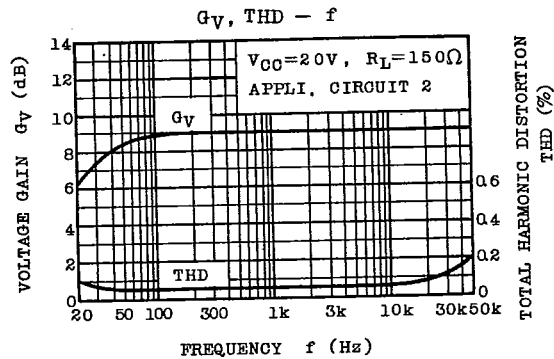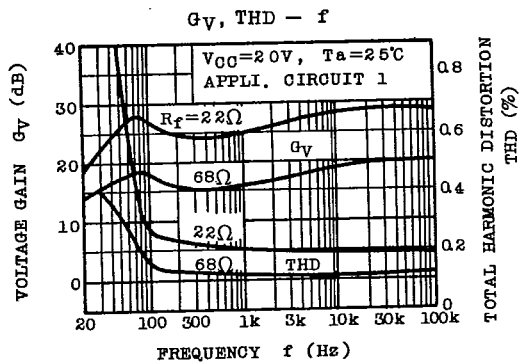

AUDIO LINEAR IC

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.