

# MICRO ELECTRONICS

2612G  
 (AG2612G)  
 LED BACKLIGHT  
 FOR LCD DISPLAY


## ABSOLUTE MAXIMUM RATINGS

Forward Current	$I_F$	220mA
Reverse Voltage	$V_R$	10V
Operating Temperature	$T_{opr}$	-20 to +70°C
Storage Temperature	$T_{stg}$	-30 to +80°C


## ELECTRO-OPTICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	$V_F$	3.8	4.1	4.4	V	$I_F=110\text{mA}$
Reverse Current	$I_R$			110	$\mu\text{A}$	$V_R=10\text{V}$
Peak Wavelength	$\lambda_p$		565		nm	$I_F=110\text{mA}$
Spectral Line Half Width	$\Delta\lambda$		40		nm	$I_F=110\text{mA}$
Brightness	B	50			$\text{cd}/\text{m}^2$	$I_F=110\text{mA}$

## MECHANICAL OUTLINE

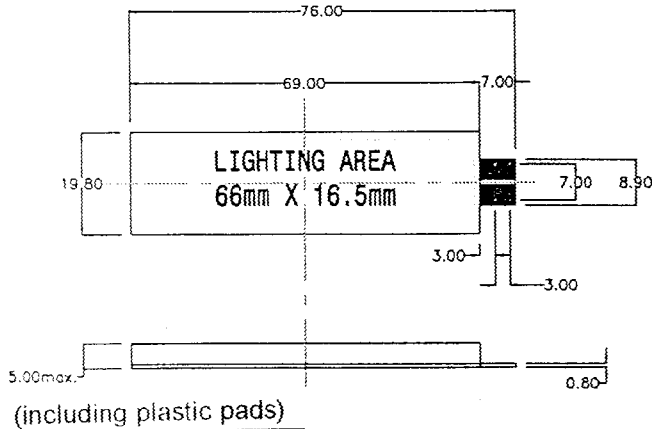

## CIRCUIT DIAGRAM

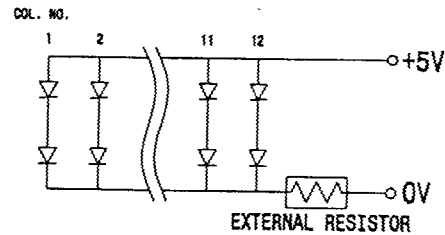

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex: 43510 Micro Hx. Tel: 2343 0181-5

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.