


# Schottky Diode FST8115, FST8120

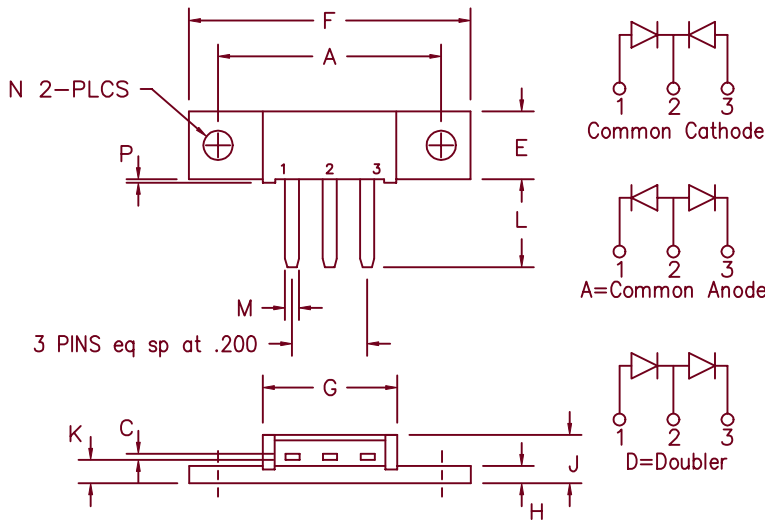

| Dim. | Inches  |         | Millimeter |         | Notes |
|------|---------|---------|------------|---------|-------|
|      | Minimum | Maximum | Minimum    | Maximum |       |
| A    | 1.180   | 1.195   | 29.97      | 30.35   |       |
| C    | .027    | .037    | 0.69       | 0.94    |       |
| E    | .350    | .370    | 8.89       | 9.40    |       |
| F    | 1.490   | 1.510   | 37.85      | 38.35   |       |
| G    | .695    | .715    | 17.65      | 18.16   |       |
| H    | .088    | .098    | 2.24       | 2.49    |       |
| J    | .240    | .260    | 6.10       | 6.60    |       |
| K    | .115    | .135    | 2.92       | 3.43    |       |
| L    | .460    | .480    | 11.68      | 12.19   |       |
| M    | .065    | .085    | 1.65       | 2.16    |       |
| N    | .151    | .161    | 3.84       | 4.09    | Dia.  |
| P    | .015    | .025    | 0.38       | 0.64    |       |

Note: Baseplate Common with Pin 2

| Microsemi Catalog Number | Industry Part Number | Working Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|----------------------|------------------------------|---------------------------------|
| FST8115*                 |                      | 15V                          | 15V                             |
| FST8120*                 | 87CNQ020A            | 20V                          | 20V                             |

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard ring protection
- Common cathode center tap
- 2X40 Amperes avg.
- 125°C Junction temperature
- Reverse energy tested
- Low forward voltage

## Electrical Characteristics

|   |                            |   |
|---|----------------------------|---|
| Average forward current per pkg             | I <sub>F(AV)</sub> 80 Amps | T <sub>C</sub> = 107°C, Square wave, R <sub>θJC</sub> = 0.5°C/W |
| Average forward current per leg             | I <sub>F(AV)</sub> 40 Amps | T <sub>C</sub> = 107°C, Square wave, R <sub>θJC</sub> = 1.0°C/W |
| Maximum surge current per leg               | I <sub>FSM</sub> 800 Amps  | 8.3 ms, half sine, T <sub>J</sub> = 125°C                       |
| Max repetitive peak reverse current per leg | I <sub>R(OV)</sub> 2 Amps  | f = 1 KHZ, 25°C, 1 μsec square wave                             |
| Max peak forward voltage per leg            | V <sub>FM</sub> 0.32 Volts | I <sub>FM</sub> = 40A: T <sub>J</sub> = 125°C                   |
| Max peak forward voltage per leg            | V <sub>FM</sub> 0.44 Volts | I <sub>FM</sub> = 40A: T <sub>J</sub> = 25°C *                  |
| Max peak reverse current per leg            | I <sub>RM</sub> 1.0 Amp    | V <sub>RRM</sub> , T <sub>J</sub> = 125°C*                      |
| Max peak reverse current per leg            | I <sub>RM</sub> 10 mA      | V <sub>RRM</sub> , T <sub>J</sub> = 25°C                        |
| Typical junction capacitance per leg        | C <sub>J</sub> 4000 pF     | V <sub>R</sub> = 5.0V, T <sub>C</sub> = 25°C                    |

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

|                                      |                  |                               |
|--------------------------------------|------------------|-------------------------------|
| Storage temp range                   | T <sub>STG</sub> | -55°C to 125°C                |
| Operating junction temp range        | T <sub>J</sub>   | -55°C to 125°C                |
| Max thermal resistance per leg       | R <sub>θJC</sub> | 1.0°C/W Junction to case      |
| Max thermal resistance per pkg       | R <sub>θJC</sub> | 0.5°C/W Junction to case      |
| Typical thermal resistance (greased) | R <sub>θCS</sub> | 0.3°C/W Case to sink          |
| Mounting Base Torque                 |                  | 10 inch pounds maximum        |
| Weight                               |                  | 0.3 ounce (8.4 grams) typical |

# FST8115, FST8120

Figure 1  
Typical Forward Characteristics - Per Leg

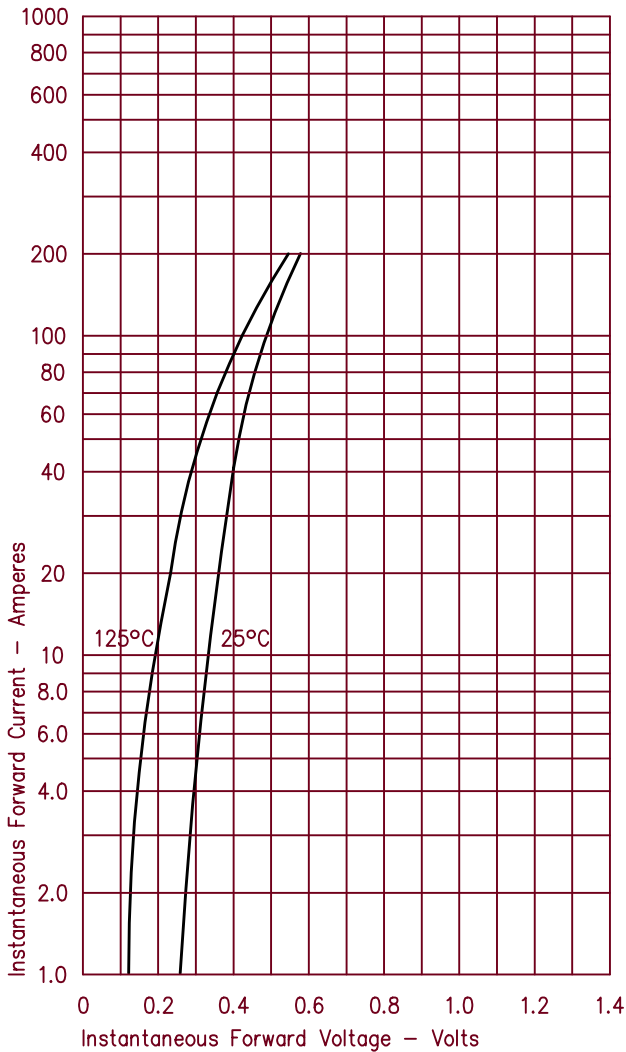


Figure 3  
Typical Junction Capacitance - Per Leg

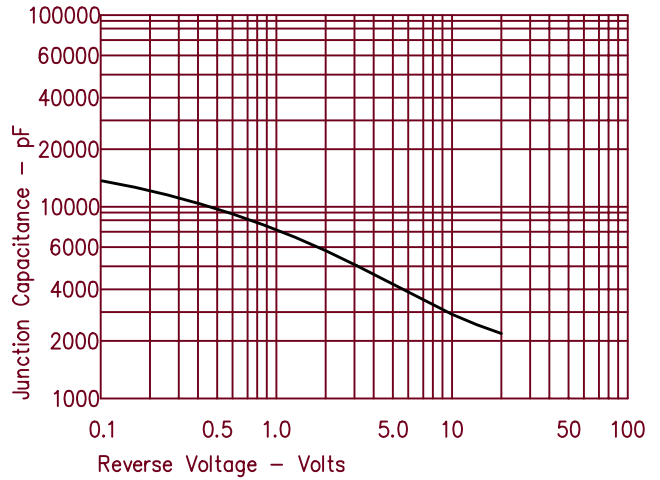


Figure 4  
Forward Current Derating - Per Leg

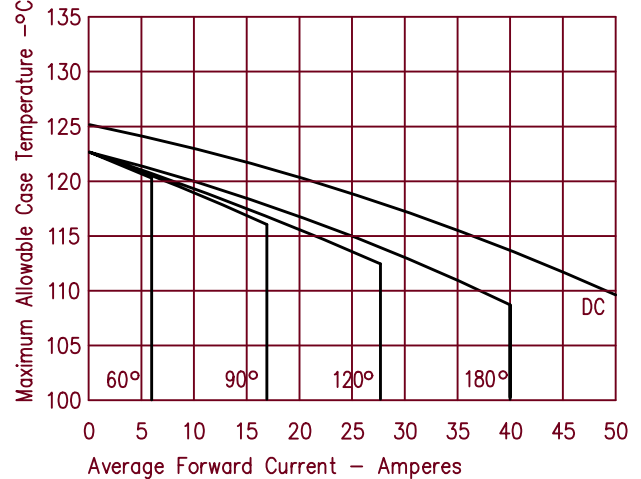


Figure 2  
Typical Reverse Characteristics - Per Leg


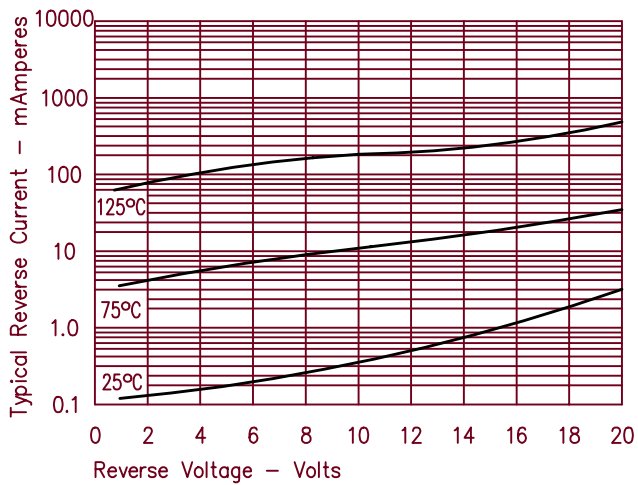


Figure 5  
Maximum Forward Power Dissipation - Per Leg

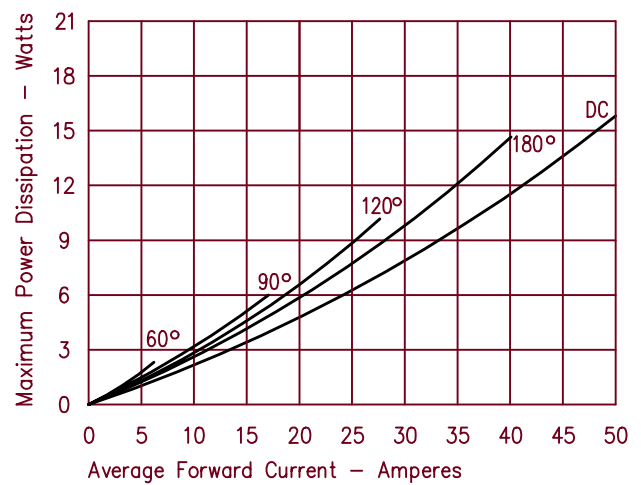

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.